

**BV15FL BRICK/BLOCK VENT W/ 1" FACE FLANGE**

**STANDARD CONSTRUCTION**

**FRAME**

1 1/2" deep, 6063-T5 extruded aluminum.  
.125" minimum frame thickness  
1" Face Flange

**BLADES**

6063-T5 extruded aluminum.  
.125" thick 6063-T5 extruded aluminum  
1" deep overlapping blade at 45 deg angle  
Blades spaced on 1" centers

**SCREEN**


18 x 14 aluminum mesh

**Maximum Size**

96" x 96"

**STANDARD FINISH**

Standard 204-R1 Clear Anodized

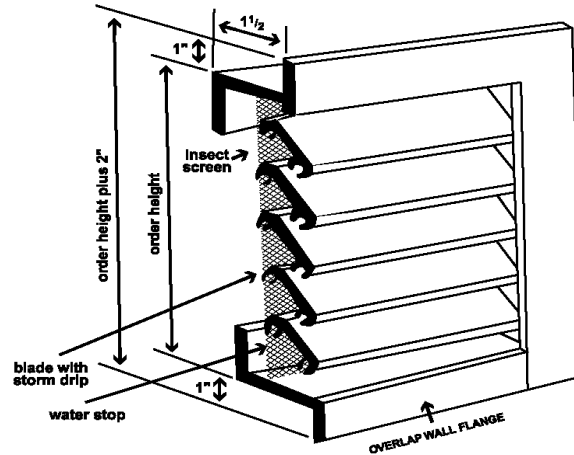

**OPTIONS AVAILABLE**

Options available at additional cost include:

- Aluminum duct attached to vent.
  - Exterior Key Flap Damper
  - Exterior operated Opposed blade damper.
- (see separate submittal for detail of these options)

**FINISH OPTIONS**

- Baked Enamel (Brick Red, Bone White, Black and Statuary bronze are standard colors) custom colors are available.
- Kynar.
- Prime coat.
- Medium Bronze Anodized
- Dark Bronze Anodized
- Mill finish

**Contact Air Performance for any additional information or special requirements**

**STANDARD SIZES**

WIDTH	HEIGHT	WIDTH	HEIGHT
8 1/8	2 3/8	16 1/2	2 3/8
8 1/8	4 3/4	16 1/2	4 3/4
8 1/8	7 3/4	16 1/2	7 3/4
12	4 3/4	16 1/2	15 3/4
12	7 3/4	24	4 3/4
12	11 3/4	24	7 3/4
15 5/8	7 3/4	32	7 3/4
15 5/8	15 3/4	48	7 3/4

**Note:** Add 1/4" to height for ribs.

These vents can be made to any width or height without exposed mullions  
For units over 30" wide - do not mortar jamb section  
1" face flange on all four sides

QTY	SIZE		OPTIONS	TAG
	WIDTH (W)	HEIGHT (H)		

PROJECT: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

LOCATION: \_\_\_\_\_

REPRESENTATIVE: \_\_\_\_\_

DATE: \_\_\_\_\_

ARCHITECT/ENGR: \_\_\_\_\_