

BV15FL-KFD BRICK/BLOCK VENT W/ 1" FACE FLANGE & EXTERIOR KEY FLAP DAMPER

STANDARD CONSTRUCTION

FRAME

1 1/2" deep, 6063-T5 extruded aluminum.
.125" minimum frame thickness
1" Face Flange

BLADES

6063-T5 extruded aluminum.
.125" thick 6063-T5 extruded aluminum
1" deep overlapping blade at 45 deg angle
Blades spaced on 1" centers

SCREEN

18 x 14 aluminum mesh

Maximum Size

96" x 96"

STANDARD FINISH

Standard 204-R1 Clear Anodized


OPTIONS AVAILABLE

Options available at additional cost include:

- Aluminum duct attached to vent.

FINISH OPTIONS

- Baked Enamel (Brick Red, Bone White, Black and Statuary bronze are standard colors) custom colors are available.
- Kynar.
- Prime coat.
- Medium Bronze Anodized
- Dark Bronze Anodized
- Mill finish

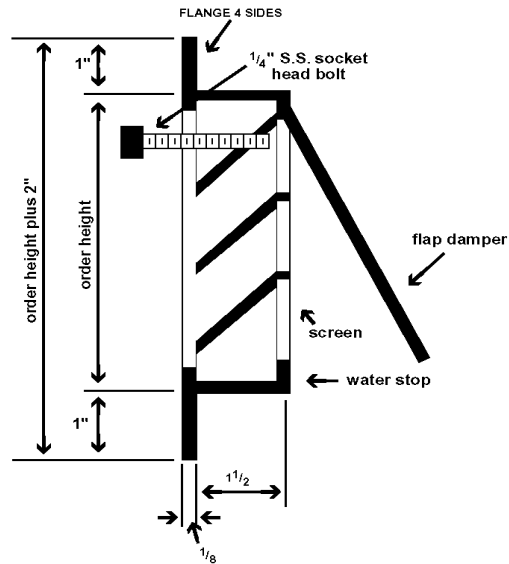

STANDARD SIZES			
WIDTH	HEIGHT	WIDTH	HEIGHT
8 1/8	2 3/8	16 1/2	2 3/8
8 1/8	4 3/4	16 1/2	4 3/4
8 1/8	7 3/4	16 1/2	7 3/4
12	4 3/4	16 1/2	15 3/4
12	7 3/4	24	4 3/4
12	11 3/4	24	7 3/4
15 5/8	7 3/4	32	7 3/4
15 5/8	15 3/4	48	7 3/4

Note: Add 1/4" to height for ribs.

These vents can be made to any width or height without exposed mullions
For units over 30" wide - do not mortar jamb section
1" face flange on all four sides

Contact Air Performance for any additional information or special requirements

QTY	SIZE		OPTIONS	TAG
	WIDTH (W)	HEIGHT (H)		

PROJECT: _____
LOCATION: _____
DATE: _____

CONTRACTOR: _____
REPRESENTATIVE: _____
ARCHITECT/ENGR: _____