

BV4 BRICK/BLOCK VENT

STANDARD CONSTRUCTION

FRAME

4" deep, 6063-T5 extruded aluminum.
.125" minimum frame thickness

BLADES

6063-T5 extruded aluminum.
.125" thick 6063-T5 extruded aluminum
1" deep overlapping blade at 45 deg angle
Blades spaced on 1" centers

SCREEN


18 x 14 aluminum mesh

Maximum Size

96" x 96"

STANDARD FINISH

Standard 204-R1 Clear Anodized

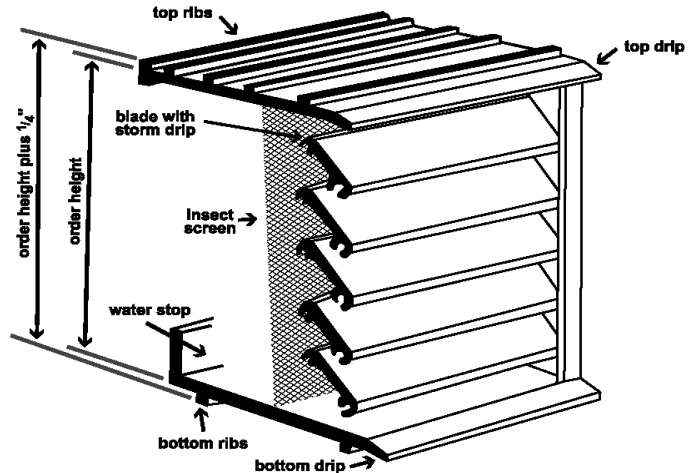

OPTIONS AVAILABLE

Options available at additional cost include:

- Exterior operated Opposed blade damper. (See separate submittal for this option)
- Aluminum duct attached to vent.

FINISH OPTIONS

- Baked Enamel (Brick Red, Bone White, Black and Statuary bronze are standard colors) custom colors are available.
- Kynar.
- Prime coat.
- Medium Bronze Anodized
- Dark Bronze Anodized
- Mill finish

STANDARD SIZES				
WIDTH	HEIGHT		WIDTH	HEIGHT
8 1/8	2 3/8		16 1/2	2 3/8
8 1/8	4 3/4		16 1/2	4 3/4
8 1/8	7 3/4		16 1/2	7 3/4
12	4 3/4		16 1/2	15 3/4
12	7 3/4		24	4 3/4
12	11 3/4		24	7 3/4
15 5/8	7 3/4		32	7 3/4
15 5/8	15 3/4		48	7 3/4

Note: Add 1/4" to height for ribs.

These vents can be made to any width or height without exposed mullions
For units over 30" wide - do not mortar jamb section

Contact Air Performance for any additional information or special requirements

QTY	SIZE		OPTIONS	TAG
	WIDTH (W)	HEIGHT (H)		

PROJECT: _____

CONTRACTOR: _____

LOCATION: _____

REPRESENTATIVE: _____

DATE: _____

ARCHITECT/ENGR: _____