


PTG-197 GRILLE (POSITION #1)

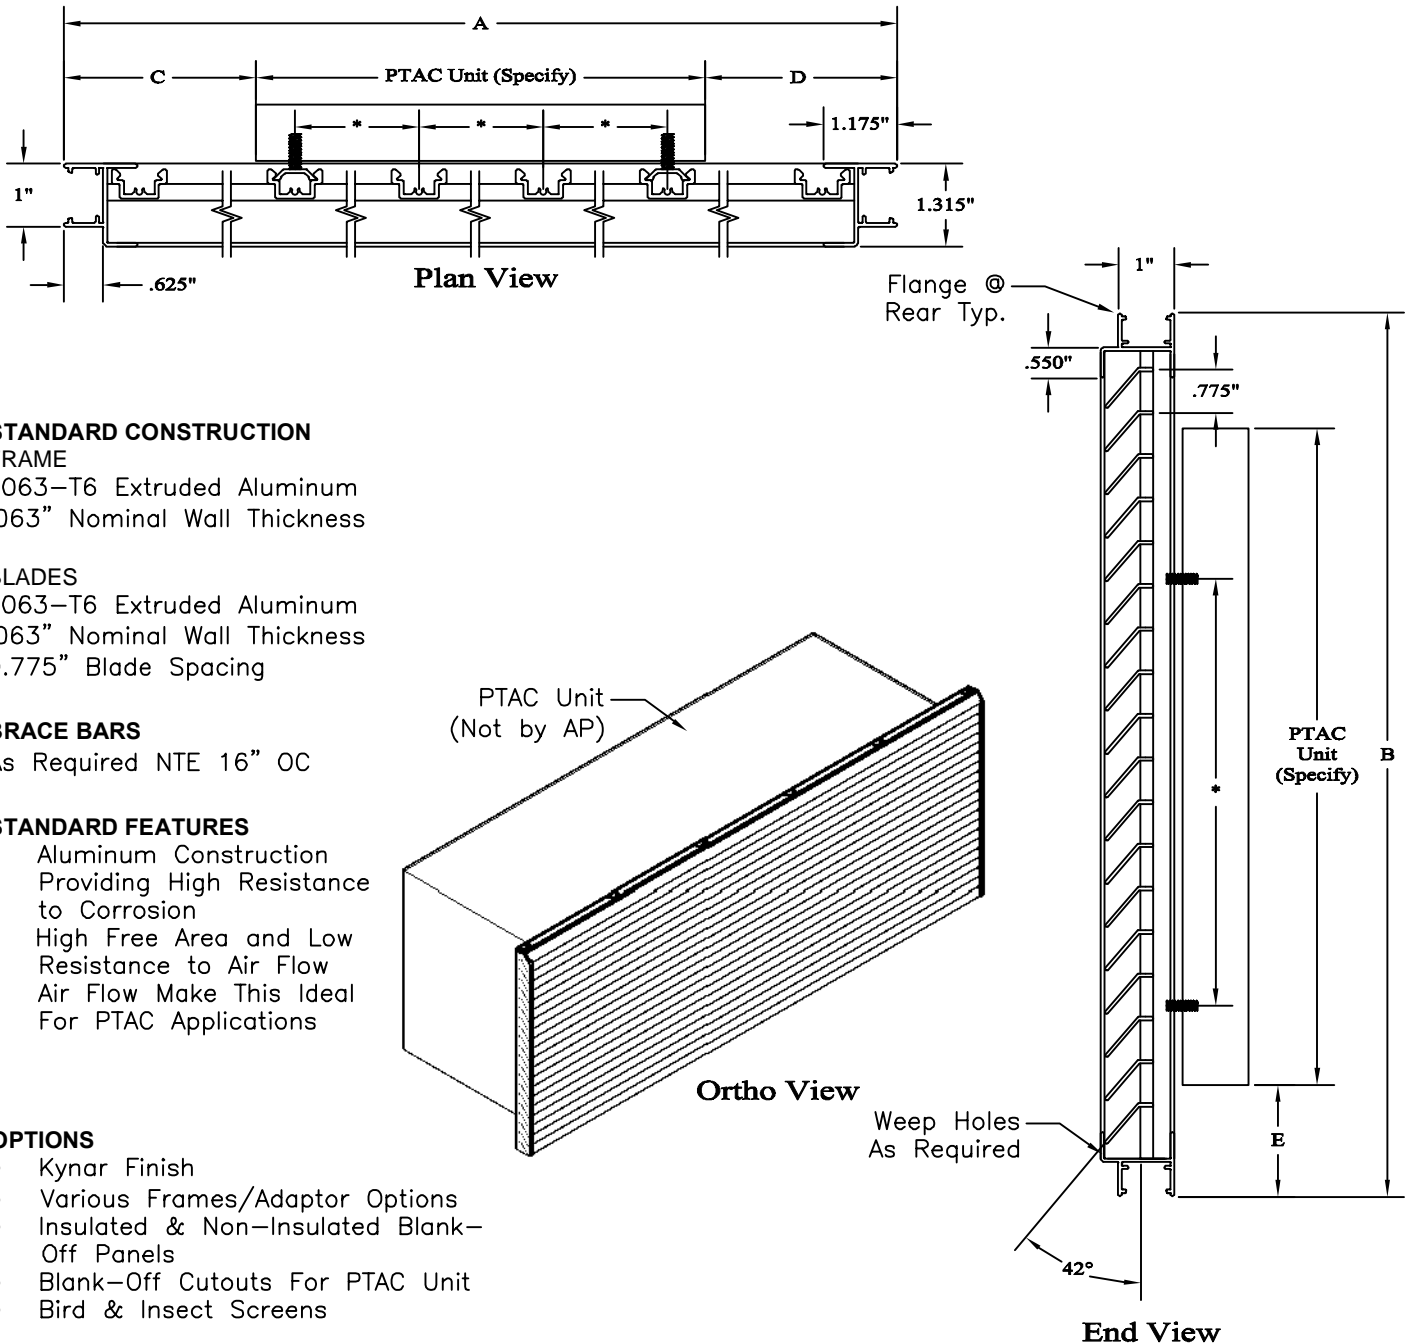

STANDARD CONSTRUCTION

FRAME

6063-T6 Extruded Aluminum
 .063" Nominal Wall Thickness

BLADES

6063-T6 Extruded Aluminum
 .063" Nominal Wall Thickness
 0.775" Blade Spacing

BRACE BARS

As Required NTE 16" OC

STANDARD FEATURES

- Aluminum Construction Providing High Resistance to Corrosion
- High Free Area and Low Resistance to Air Flow Air Flow Make This Ideal For PTAC Applications

OPTIONS

- Kynar Finish
- Various Frames/Adaptor Options
- Insulated & Non-Insulated Blank-Off Panels
- Blank-Off Cutouts For PTAC Unit
- Bird & Insect Screens

* Dimensions Determined by Unit, Model And Type

| Unit Type | Unit Model No. | Specify Size | | | | | Variations |
|-----------|----------------|--------------|---|---|---|---|------------|
| | | A | B | C | D | E | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |